
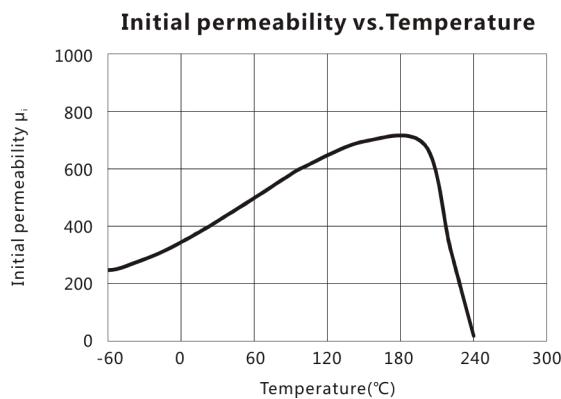
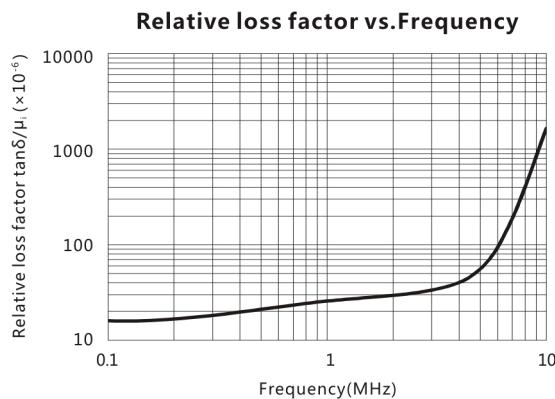


材料 / Material: TN41H

特点 / Features:

1. 耐热冲击 / Thermal Shock Resistance

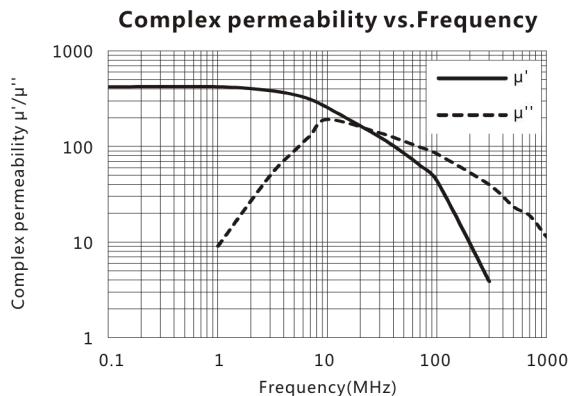

Initial permeability	μ_i	25°C	$400 \pm 20\%$
Saturation magnetic flux density	B_s (mT) 4000A/m	25°C	430
Relative loss factor 100kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤ 25
Relative temperature coefficient	$\alpha_{\mu\text{ir}}$ ($\times 10^{-6}/^\circ\text{C}$)	20 ~ 60°C	13
Curie temperature	T_c (°C)		> 230
Electrical resistivity	ρ (Ω·m)		10^6
Density	d (kg/m ³)		5.1×10^3

Test core : Toroid(mm)

OD : 12.7

ID : 7.9

H : 6.5

